

Dimmable LED Constant Voltage Power Supply - 50W series PWM output

Features

- Output constant voltage
- Universal AC input: 100-130VAC
- Power Factor: up to 0.65
- High efficiency: up to 84%
- Protection: short circuit/over loading/over current/ Over temperature
- Full protection plastic housing
- Easy installation
- Cooling by free air convection
- Compatible with Forward phase, Magnetic low voltage, Triac Dimmers
- Strong compatibility, flicker-free dimming
- Suitable for LED lighting and moving sign applications and others
- Compliance to worldwide safety regulations for lighting




Specification

Part Number		PS-12LPS50-DIM	PS-24LPS50-DIM
Certificates		ETL, cETL, FCC	ETL, cETL, FCC
output	DC Voltage	12V	24V
	Voltage Tolerance	±0.5V	
	Rated current	4.17A	2.08A
	Rated power	50W	
input	Voltage Range	100~130VAC	
	Frequency Range	47~63HZ	
	Power Factor (Typ.)	PF≥0.65	
	Efficiency (Typ.)	83%	84%
	AC Current (max)	1.6A	1.6A
	Leakage current	< 0.50mA/120VAC	
Protection	Short Circuit	Hiccup mode, recovers automatically after fault condition is removed	
	Over Current	≤1.2*I out	
	Over Loading	≤120%	
	Over temperature	100°C±10°C (The output voltage will turn off when the temperature is higher than 100°C±10°C, after the temperature drop off, it will recovery automatic)	
Environment	Working TEMP.	-40~+60°C	
	Working Humidity	20~90%RH, non-condensing	
	Storage TEMP. Humidity	-40~+80°C, 10~95%RH	
	TEMP .coefficient	±0.03%/°C (0~50°C)	
	Vibration	10~500Hz, 2G 10min./1 cycle, period for 60min. each along X,Y,Z axes	
Safety& EMC	Safety standards	UL8750+UL1310	
	Withstand voltage	I/P-O/P:1500VAC	
	Isolation resistance	I/P-O/P: 100MΩ/500VDC/25°C/70%RH	
	EMC EMISSION	FCC Part 15 B	
others	Net. Weight	0.35Kg	
	Size	178*61*24mm (L*W*H)	
	packing	290*215*140mm 20pcs /CTN	

Dimmable LED Constant Voltage Power Supply - 50W series PWM output

Notes	<p>1. All parameters if NOT specially mentioned are measured at 120VAC input , rated load and 25°C of ambient temperature.</p> <p>2. To extend the driver's using life ,please reduce the loading at lower input voltage.</p> <p>3.Loading should be 5-100%.</p>
-------	--

■ KVP series 50W Phase/Triac Dimmable driver Mechanical Specification

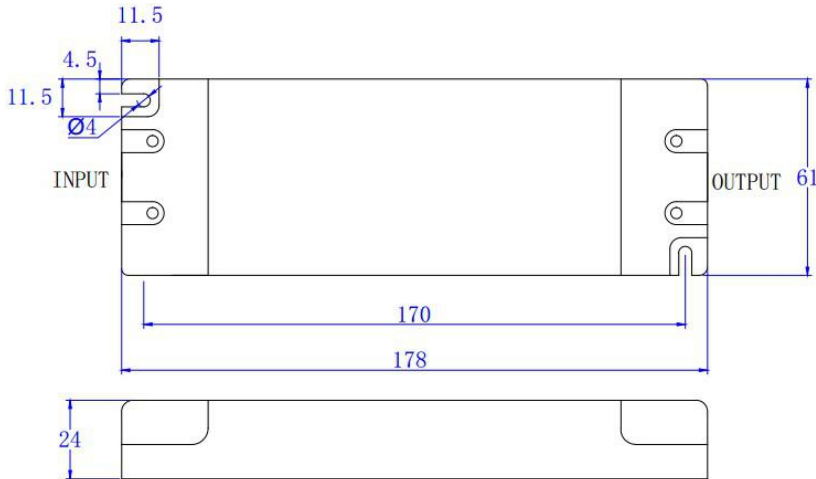

※ Input (L) and (N) with wires to be connected AC.

※ Output LED SEC :(LED+) (LED-)

■Dimming Operation

※The Pulse-Width Modulation (PWM) of output voltage can be adjusted through input terminal of the AC phase line(L) by connection a triac dimmer.

※Usually matching with leading edge/Forward phase Triac Dimmers(Can customized as a driver only matching trailing edge Triac Dimmers if needed).

※Please try to use dimmers with power at least 2.5 times as the output power of the driver.

※for Forward phase,Magnetic low voltage and Triac Dimmers

■Warning


※Prevent to reverse polarity;

※Risk of Electric Shock. When used outdoors, install only on a circuit protected by a Class A GFCI;

※Risk of Fire. Installation involves special wiring methods to run wiring through a building structure. Consult a qualified electrician;

※Risk of Electric Shock. Mount the unit at a height greater than 1 foot from the ground surface.

■Derating Curve

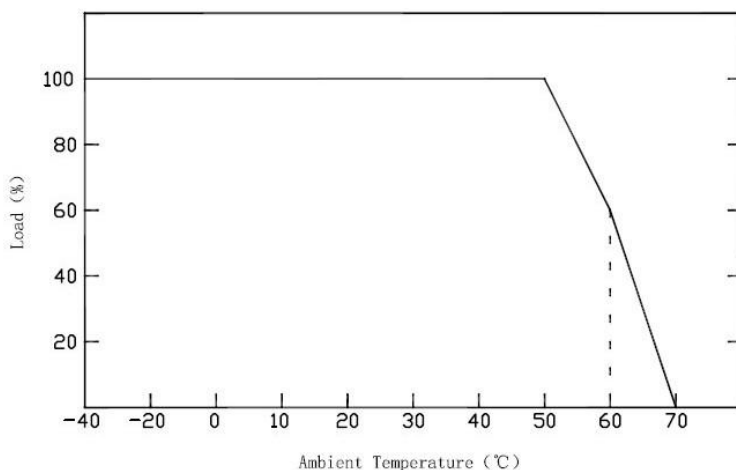

Dimmable LED Constant Voltage Power Supply - 50W series PWM output

※To extend their life, please refer to the Derating Curve and derate according to the temperature

■ **Connecting Diagram**

